

DCF964NT AKKU DREHMOMENTSCHLÜSSEL 1

NOTES:


1. REFER TO GREASE PLACEMENT DOCUMENT FOR GREASE PROCEDURE.

2. TORQUE TO BE 4.5 ± 0.3 NM (39.8 ± 2 IN-LBS).

3. TORQUE TO BE 1.7 ± 0.2 NM (15 ± 2 IN-LBS).

4. TORQUE TO BE 0.9 ± 0.2 NM (8 ± 2 IN-LBS).

5. TIGHTEN SCREWS TO 0.5 NM ± 0.1 NM. DO NOT OVERTIGHTEN.

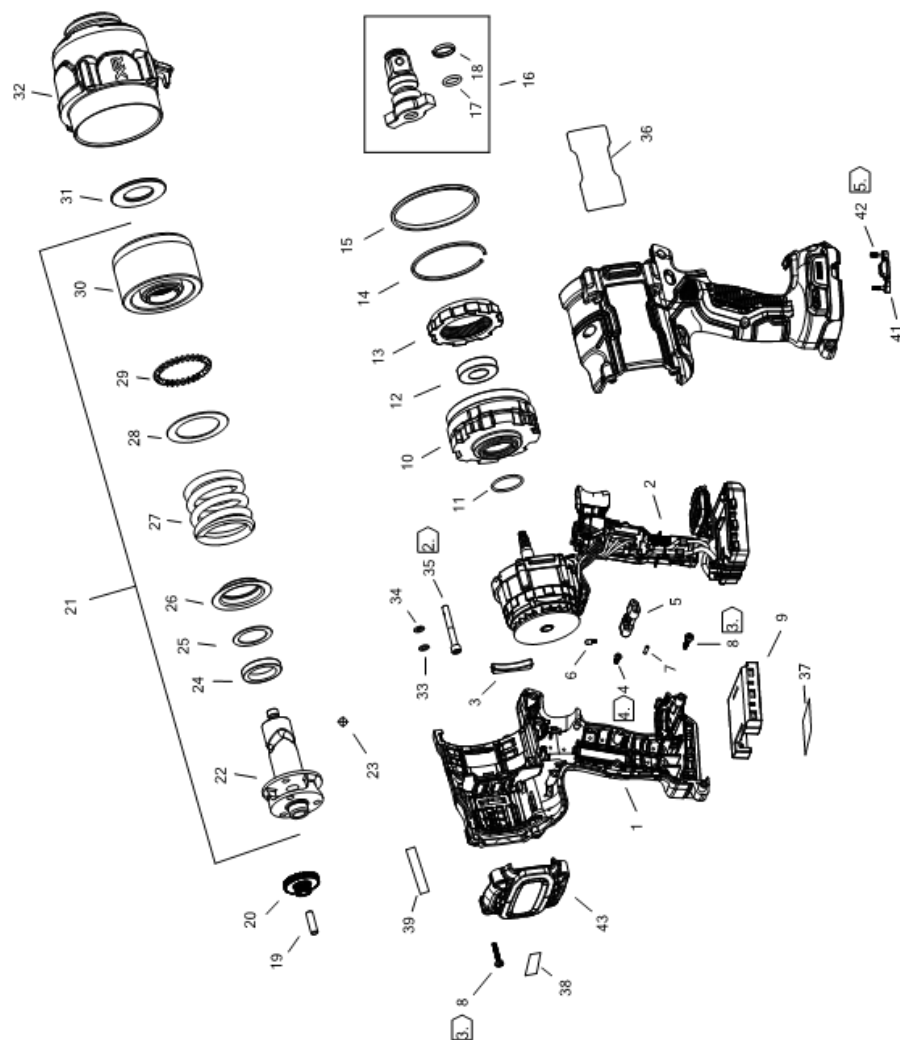

Reference:
Refer To Part List

